

Length // ► Feed direction

Width




LR3x20 Z6x24

Figure drawn to scale 1:1

LR3x20 Z6x24



### Available materials\*

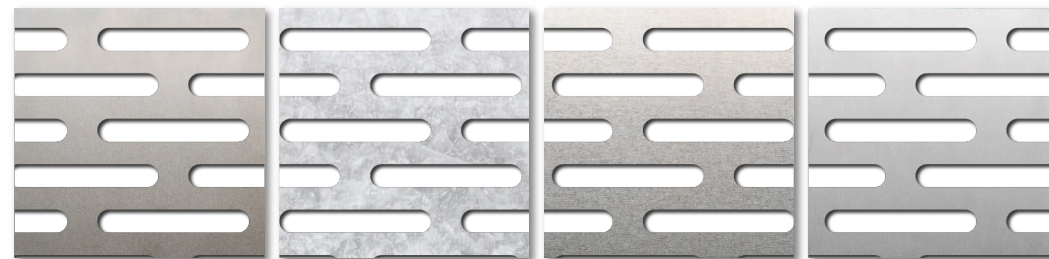


Steel


Sendzimir-galvanised

Aluminium

Stainless steel




Brass



Powder-coated

Available in standard formats and individual dimensions (w x l) of at least 125 x 300 mm to maximum 1,500 x 3,000 mm, as well as in sheet thicknesses from 1.0 to 3.0 mm.



Slotted holes  
staggered pitch  
w = 3 mm. l = 20 mm  
c<sub>1</sub> = 3 mm. c<sub>2</sub> = 4 mm  
p<sub>1</sub> = 6 mm. p<sub>2</sub> = 24 mm  
Open area: 40.32 %

\* Not all materials are available in all formats and sheet thicknesses.



SELECT AND ORDER  
ONLINE

All variants of this product can be found online in our shop. Simply enter the product name in the online search.

